

**United States Department of Energy
National Nuclear Security Administration
Sandia Field Office**

**NESHAP ANNUAL REPORT
CY 2014**



SANDIA NATIONAL LABORATORIES, New Mexico

Albuquerque, New Mexico

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

U.S. Department of Energy
National Nuclear Security Administration
Air Emission Annual Report
(Under 40 CFR 61, Subpart H)
Calendar Year 2014

Site Name: Sandia National Laboratories, New Mexico

Owner

Office: Department of Energy, National Nuclear Security Administration, Sandia
Field Office

Address: Pennsylvania and H Street
Albuquerque, New Mexico 87185-5400

Contact: Susan Lacy Phone: 505-845-5542

Site Information

Operator: Sandia National Laboratories, New Mexico

Address: P.O. Box 5800
Albuquerque, New Mexico 87185-0729

Contact: Stephanie Salinas/Dept. 4143 Phone: 505-845-7711

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1. INTRODUCTION	1
2. FACILITY INFORMATION.....	1
2.1 Site Description	1
2.2 Point Radiological Sources.....	1
2.3 Radiological Releases During CY 2014.....	4
2.4 Environmental Monitoring	7
2.5 Emission Release Parameters	7
3. DOSE ASSESSMENT	8
3.1 Description of Model Used	8
3.1.1 CAP88-PC	8
3.1.2 Summary of CAP88-PC Input Data.....	8
3.1.2.1 Meteorological Data.....	8
3.1.2.2 Facilities Modeled	8
3.1.2.3 Receptor Locations.....	9
3.1.2.4 Demographic Data for Modeling	9
3.2 Dose to the Maximum Exposed Individual	9
3.3 Dose to the Regional Population	9
3.4 Dose to Kirtland Air Force Base Residents.....	10
4. OTHER NESHAP COMPLIANCE CRITERIA.....	11
4.1 Continuous and Periodic Confirmatory Air Monitoring.....	11
4.2 New or Modified Radiological Sources.....	11
4.3 NESHAP Subparts Q and T	11
4.4 Unplanned Radiological Releases	11
5. REFERENCES.....	11

LIST OF TABLES AND FIGURES

Table 1. Summary of Reported Radionuclide Releases for CY 2014.....	5
Table 2. Release Parameters for CY 2014 SNL/NM Facilities.....	6
Table 3. Weather Data for CY 2014.....	8
Figure 1. Sources and Receptors.....	3

ACRONYMS and ABBREVIATIONS

ACRR	Annular Core Research Reactor
AHCF	Auxiliary Hot Cell Facility
CAP88-PC	Clean Air Act Assessment Package – 1988 Personal Computer
CFR	Code of Federal Regulation
Ci	curie(s)
CY	Calendar Year
DOE	Department of Energy
ECF	Explosive Components Facility
EDE	effective dose equivalent
EPA	Environmental Protection Agency
HERMES	High Energy Radiation Megavolt Electron Source
KAFB	Kirtland Air Force Base
km	kilometer
m	meter
MEI	maximally exposed individual
mrem	millirem
NGF	Neutron Generator Facility
NM	New Mexico
RMWMF	Radioactive and Mixed Waste Management Facility
RPICL	Radiation Protection Instrument Calibration Laboratory
SNL	Sandia National Laboratories
START	Sandia Tomography and Radionuclide Transport
TA	Technical Area
U.S.	United States
yr	year

1. INTRODUCTION

This report provides a summary of the radionuclide releases from the United States (U.S.) Department of Energy (DOE) National Nuclear Security Administration facilities at Sandia National Laboratories, New Mexico (SNL/NM) during Calendar Year (CY) 2014, including the data, calculations, and supporting documentation for demonstrating compliance with 40 Code of Federal Regulation (CFR) 61, [Subpart H--NATIONAL EMISSION STANDARDS FOR EMISSIONS OF RADIONUCLIDES OTHER THAN RADON FROM DEPARTMENT OF ENERGY FACILITIES](#). A description is given of the sources and their contributions to the overall dose assessment. In addition, the maximally exposed individual (MEI) radiological dose calculation and the population dose to local and regional residents are discussed.

2. FACILITY INFORMATION

2.1 Site Description

SNL/NM is located in Bernalillo County, at the foot of the Manzanita Mountains adjacent to Albuquerque, NM. At their nearest points, SNL/NM facilities are 2.5 miles south of Interstate 40 and approximately 6.5 miles east of downtown Albuquerque. The facilities and remote test areas are located on Kirtland Air Force Base (KAFB) and on property that has been administratively withdrawn from the Forest Service by DOE and the Air Force with co-use agreements.

SNL/NM consists of five secured technical areas (TA) where all NESHAP sources are located, buildings in non-secured areas, and several remote testing areas. These remote test areas are collectively known as the Coyote Test Field and are located in the canyons on the west side of the Manzanita Mountains.

2.2 Point Radiological Sources

Point releases are sources that potentially discharge material to the atmosphere through a facility's exhaust stack or rooftop vent. During CY 2014, the following facilities submitted an inventory of radionuclide releases to the environment and are listed according to location (Figure 1).

- TA-I: Sandia Tomography and Radionuclide Transport Laboratory (START), Radiation Protection Instrument Calibration Laboratory (RPICL), and Neutron Generator Facility (NGF)
- TA-II: Explosive Components Facility (ECF)
- TA-III: Radioactive and Mixed Waste Management Facility (RMWMF)
- TA-IV: High Energy Radiation Megavolt Electron Source (HERMES) and Z Facility
- TA-V: Auxiliary Hot Cell Facility (AHCF), and the Annular Core Research Reactor (ACRR).

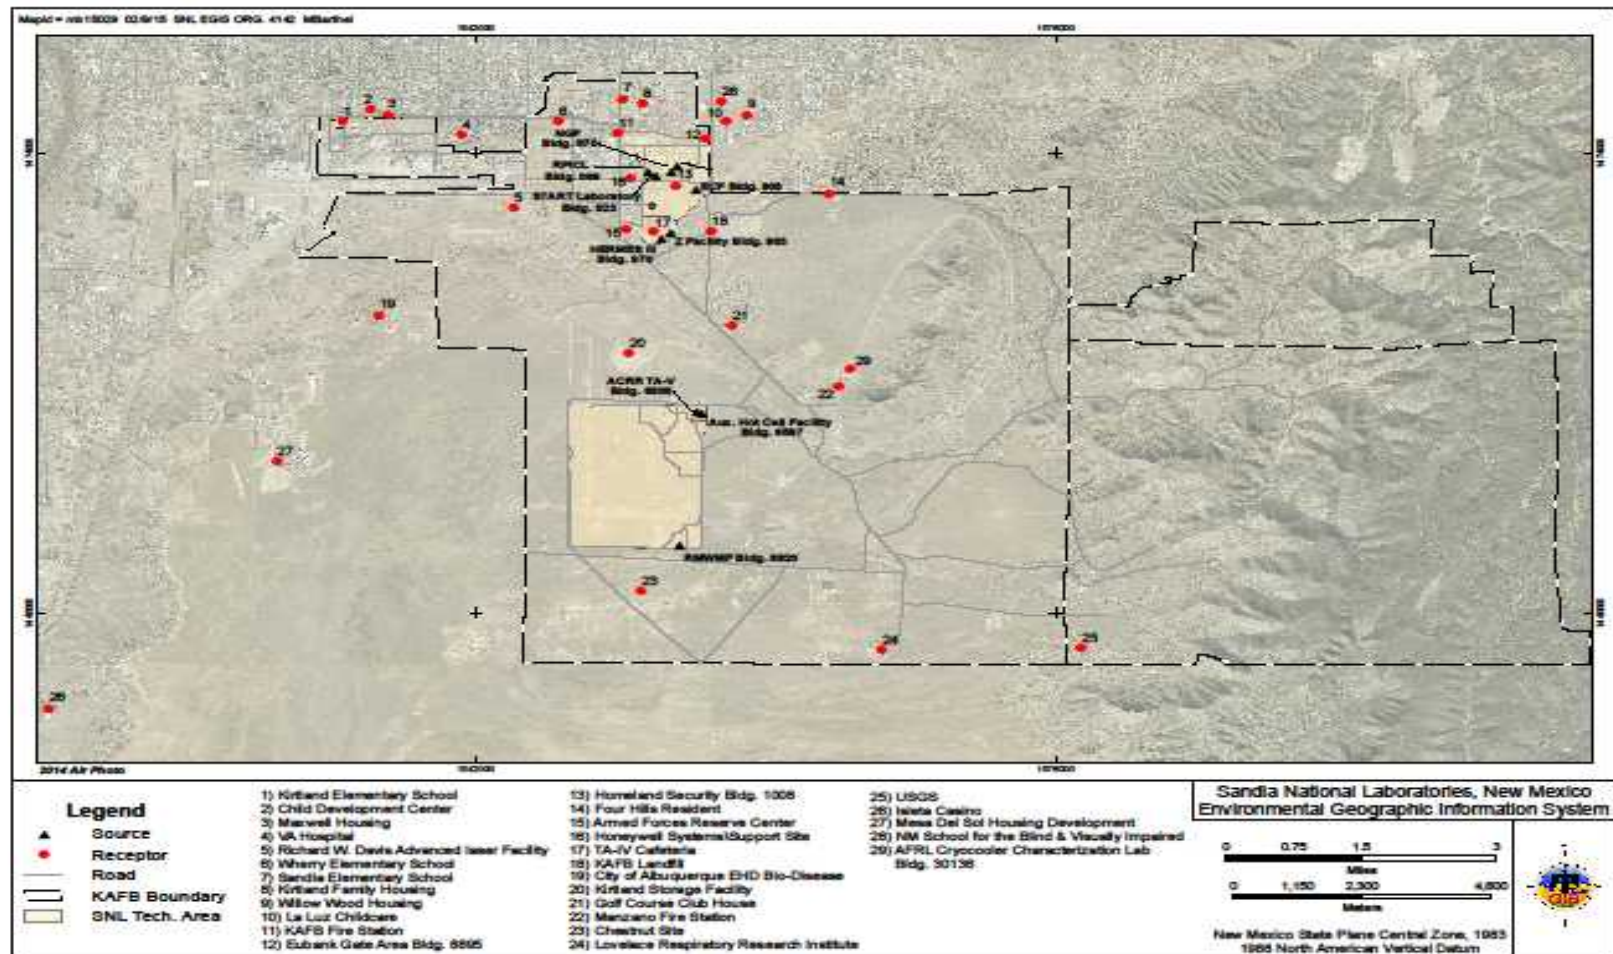


Figure 1. Sources and Receptors

2.3 Radiological Releases During CY 2014

The facilities which were evaluated for airborne releases are included in the calculation of the total dose to the MEI. **Table 1** summarizes the reported radionuclide releases from the facilities. **Table 2** summarizes the location of each facility and the facility release parameters.

The largest point source release during CY 2014 was 13 curies (Ci) of tritium from the NGF, located in TA-I. The release inventories for the remaining sources were negligible.

Table 1. Summary of Reported Radionuclide Releases for CY 2014.

Source Name, Location	Description	Source Type	Monitoring Method	Radio-nuclides Emitted	Reported Release Amount (Ci/yr)
ACRR, TA-V	Reactor used to perform in-pile experiments for severe-reactor-accident research projects.	Point	Periodic	⁴¹ Ar	5.57
AHCF, TA-V	The AHCF is used to identify, sort, characterize, and repackage legacy nuclear materials for permanent removal from the SNL/NM site. Legacy material may include accountable nuclear material, spent nuclear fuel, and radiological material.	Point	Periodic	⁸⁵ Kr ⁹⁰ Sr ²⁴¹ Am ²³⁸ Pu ²⁴¹ Pu	5.86E-10 4.47E-10 7.76E-10 3.12E-10 2.37E-09
ECF, TA-II	Facility used for testing neutron-generator design and manufacturing.	Point	Calculation	³ H	1.27E-03
HERMES, TA-IV	Gamma simulator used primarily for simulating the effects of prompt radiation from a nuclear burst on electronics.	Point	Periodic	¹³ N ¹⁵ O	1.53E-04 1.50E-05
NGF, TA-I	Principal production facility for neutron generators.	Point	Continuous	³ H	13.0
RMWMF, TA-III	Facility that handles radioactive and mixed waste products.	Point	Continuous	³ H (oxide) ³ H (elemental) ²⁴¹ Am ¹³⁷ Cs	4.43E-01 3.13E-01 2.39E-06 6.61E-08
RPICL, TA-I	Laboratory that performs radiation detection equipment calibration.	Point	Calculation	³ H	3.63E-05
START, TA-I	Small-scale laboratory operation.	Point	Calculation	⁹⁹ Tc	1.60E-15
Z Facility, TA-IV	Experimental facility for research on light-ion inertial confinement fusion.	Point	Calculation	³ H	1.45E-03

⁴¹Ar = Argon 41, ⁸⁵Kr = Krypton 85, ⁹⁰Sr = Strontium 90, ¹³⁷Cs = Cesium 137, ³H = Tritium, ²⁴¹Pu = Plutonium 241, ¹³N = Nitrogen 13, ¹⁵O = Oxygen 15, ⁹⁹Tc = Technetium 99

Table 2. Release Parameters for CY 2014 SNL/NM Facilities

Source Name, Location	Building #	Release Height ^a meter (m)	Stack Diameter (m)	Release Temperature (°C)	Exhaust Velocity (m/s)
ACRR, TA-V	6588	16.5	0.2	20	18.9
AHCF, TA-V	6597	16.2	0.4	21	14.6
ECF, TA-II	905	3.0	0.5	21	15.4
HERMES, TA-IV	970	13.5	0.05	13	7.8
NGF, TA-I	870	17.4	1.2	20	16.5
RMWMF, TA-III	6920	16.8	0.6	25	8.6
RPICL, TA-I	819	7.38	0.3	22	7.9
START, TA-I	823	-- ^c	-- ^c	21	0.0 ^b
Z Facility, TA-IV	983	15.8	0.2	21	6.1
<p>a. Includes building height.</p> <p>b. Exhaust velocity is variable. In the absence of more definitive information, a conservative value of 0.0 meter per second (m/s) is used to model the cumulative Effective Dose Equivalent (EDE) from this facility.</p> <p>c. Data is unavailable; therefore, a conservative value of 0.0 m is used to model the cumulative EDE from this facility.</p>					

2.4 Environmental Monitoring

A detailed description of the ongoing environmental surveillance activities at SNL/NM is published annually in SNL's 2014 *Annual Site Environmental Report, Albuquerque, New Mexico* (SNL 2015).

SNL/NM currently has eight meteorological towers in use at select locations across KAFB. The dose assessment for SNL/NM NESHAP compliance is performed using on-site meteorological data from two of the eight stations.

There were no environmental restoration activities conducted in CY2014 with the potential to release radionuclide emissions.

2.5 Emission Release Parameters

Point source releases potentially occur from stack exhausts or vents. For those releases, the Clean Air Act Assessment Package – 1988 Personal Computer (CAP88-PC) code calculates a momentum-type plume rise. Plume rise is calculated from the stack diameter and exhaust velocity. Stack characteristics for point sources are listed in **Table 2**. Thermally hot exhausts, which lead to much higher plume rises, do not exist at any of the individual SNL/NM facilities considered in this report.

3. DOSE ASSESSMENT

3.1 Description of Model Used

This section summarizes the CAP88-PC computer code for air dispersion and radionuclide dose assessment.

3.1.1 CAP88-PC

Compliance procedures for DOE facilities [40 CFR 61.93(a)] require the use of CAP88-PC or other approved procedures to calculate effective dose equivalents (EDE) to members of the public. All dose assessments presented in this report were calculated using CAP88-PC Windows Version 4.

3.1.2 Summary of CAP88-PC Input Data

Radionuclide-specific parameters such as dose conversion factors, decay constants, and dry deposition velocity are provided as part of the CAP88-PC computer code. However, several types of site-specific and user-supplied data are required by the CAP88-PC code. These include meteorological, demographic, radiological inventories, receptor location, and facility release parameters. This section summarizes the required user-supplied data for running the CAP88-PC code.

3.1.2.1 Meteorological Data

Meteorological data used in the CY 2014 dose assessment were obtained from on-site meteorological stations located near the emission sources. These data collectively consist of hourly meteorological observations of wind direction, wind speed, and stability class (inferred from wind and solar insolation data) that formed a normalized distribution from which all wind and stability frequency-of-occurrence data was derived. The CY 2014 SNL/NM meteorological station data were used to create stability array data files that, once converted to wind files (WND), could be incorporated into the CAP88-PC code to perform the dose assessment.

Data from two SNL/NM meteorological tower stations -- A21 and A36 -- were used for the dose assessment (Table 3). These stations were selected based on distance from radiological source locations, tower height (all meteorological data were obtained at a height of 10 m), and data availability.

Table 3. Weather Data for CY 2014

Tower	Temperature (°C)	Relative Humidity (%)	Precipitation (cm)	Absolute Humidity
A21	14.67	38.0	24.61	5.130
A36	14.35	38.9	15.9	5.085

3.1.2.2 Facilities Modeled

By regulation, continuous monitoring is required of radionuclide sources that have a potential EDE to the MEI of > 0.1 millirem per year (mrem/yr). There are no facilities at SNL/NM requiring continuous stack monitoring according to the regulation. However, several facilities

report emissions based on either stack monitoring or calculations based on measured parameters. While not required by regulation, stack monitoring and calculations based on measured parameters are performed as part of SNL/NM's best management practices.

The sources identified at SNL/NM are the NGF, the START Laboratory, and the RPICL located in TA-I; the ECF located in TA-II; the RMWMF located in TA-III; Z Facility and the HERMES Facility located in TA-IV; and the ACRR and AHCF located in TA-V.

3.1.2.3 Receptor Locations

Numerous receptor locations were evaluated as potential locations of maximum exposure. These locations are either on-site areas (within the KAFB Boundary) or off-site areas where members of the public are known to reside for varying lengths of time. Figure 1 of this document illustrates the receptor locations.

3.1.2.4 Demographic Data for Modeling

Demographic data relevant to NESHAP reporting include population, beef cattle, dairy cattle, and the utilized food crop area fraction. The CAP88-PC code has demographic data available for the Albuquerque area that is based on state-wide demographic averages. The estimated State of New Mexico urban and county population data obtained from the U.S. Census Bureau (www.census.gov) data were used to calculate the population distribution within each of the eighty CAP88-PC analysis zones (16 wind direction sectors subtended by 5 concentric, equally spaced rings to an 80-kilometer (km) radius). A total of 909,953 people were estimated to live within the 80-km-radius study area.

Additional demographic data includes:

- beef cattle density of 0.58 per km²,
- dairy cattle density of 0.93 per km², and
- a food crop area fraction of 6.2E-04

3.2 Dose to the Maximum Exposed Individual

The calculation of the MEI of the public is required annually under NESHAP regulations, 40 CFR 61, Subpart H. The regulation requires that the cumulative EDE from exposure to all site-wide airborne radionuclide releases not exceed the 10 mrem/yr standard. The dose contribution from each of the sources was combined to yield the overall dose to the MEI. Release amounts from individual facilities at SNL/NM were determined from either calculations based on actual measurements, measured stack parameters, or from calculations based on radionuclide inventory.

The on-site MEI was determined to be located at the Kirtland Storage Facility. The EDE calculated for the MEI was estimated to be 8.30E-04 mrem/yr, primarily from exposure to H-3 released from the NGF. The off-site MEI dose was 8.32E-04 mrem/yr at the Eubank Gate. The MEI doses are well below the NESHAP standard of 10 mrem/yr.

3.3 Dose to the Regional Population

A population dose was calculated by the CAP88-PC code for the 80-km radius surrounding the SNL/NM site using a single common grid analysis (i.e., single release point) for all SNL/NM sources. Because the analysis area is so large, the relatively small distances between sources have a minimal impact on the resulting 80-km-radius regional population dose. The population dose contribution from each NESHAP source was estimated and then summed to obtain the

regional population dose. The local regional population distributions were derived from this population data and input to CAP88-PC.

The population dose from CY 2014 SNL/NM operations was calculated to be $4.23\text{E-}02$ person-rem/yr for the surrounding population residing outside Kirtland AFB. The population dose is well below the NESHAP standard of 10 mrem/yr.

3.4 Dose to Kirtland Air Force Base Residents

A population dose was calculated for KAFB residents resulting from exposure to all SNL/NM routine radiological emissions. Because there are only a few residential neighborhoods on KAFB, the KAFB population dose was determined based on the maximum individual dose calculated for each of the KAFB housing compounds.

KAFB provided current housing populations to complete an accurate dose calculation to base residents. The total number of residents at KAFB housing included 3,466 individuals. The population dose for each KAFB housing unit was calculated as the product of the housing unit population and the housing unit individual dose (calculated by the CAP88-PC code). The housing unit population doses were then summed to obtain a composite KAFB population dose. An annual composite population dose of $4.52\text{E-}04$ person-rem/yr was estimated for KAFB. The population dose for KAFB is well below the NESHAP standard of 10 mrem/yr.

4. OTHER NESHAP COMPLIANCE CRITERIA

In addition to the MEI dose criterion imposed under NESHAP, there are a number of other criteria. These criteria are addressed below.

4.1 Continuous and Periodic Confirmatory Air Monitoring

Under the NESHAP regulations, monitoring is required for any source that has the potential to contribute 0.1 mrem/yr or more to the MEI. However, after a programmatic review of the SNL/NM NESHAP program in 1997, SNL/NM personnel determined that under routine and normal operations, there are currently no sources at SNL/NM that require stack monitoring. This remains unchanged. However, as part of SNL/NM's best management practice, the NGF main stack and the RMWMF are continuously monitored for discharges of radionuclides to the environment.

4.2 New or Modified Radiological Sources

During CY 2014, there were no new or modified radiological sources.

4.3 NESHAP Subparts Q and T

During CY 2014, no radon emissions occurred from any SNL/NM facilities.

4.4 Unplanned Radiological Releases

There were no unplanned radiological releases in CY 2014.

5. REFERENCES

- | | |
|----------|--|
| EPA 1989 | U.S. Environmental Protection Agency, 40 CFR 61, Subpart H, <i>National Emission Standards for Emissions of Radionuclides Other than Radon from Department of Energy (DOE) Facilities</i> , December 15, 1989. |
| SNL 2015 | <i>2014 Annual Site Environmental Report for Sandia National Laboratories/NM</i> , 2014. |